







# DAEX25X4-4 Bullfrog Vented Disc Spider 25 mm x 4 Exciter 320 mm Cable and Connectors 40W 8 Ohm

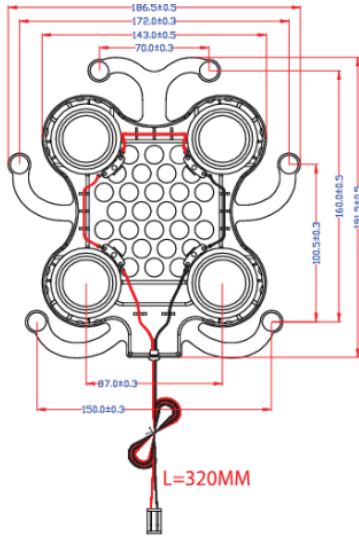

PARAMETERS	
Impedance	8 ohms
Re	7.3 ohms
Le	0.29 mH
Fs	285 Hz
Qms	N/A
Qes	N/A
Qts	N/A
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	4 x 25 mm
SPL	N/A
RMS Power Handling	40 watts
Usable Frequency Range (Hz)	N/A

- ### FEATURES
- Pre-applied 3M™ VHB™ adhesive for quick, secure installation
  - Four 24mm voice coils improves power handling to 40 watts RMS
  - Rare-earth neodymium motor and a proprietary voice coils
  - Easy 8 ohm load, can be powered by most amplifiers

- ### APPLICATIONS
- Invisible home theater and multi-room audio
  - Electronic gaming machines
  - Advertising signage
  - Point-of-purchase displays
  - Multimedia exhibits
  - Commercial distributed audio
  - Kiosks
  - Automotive audio
  - Bathroom tubs and showers

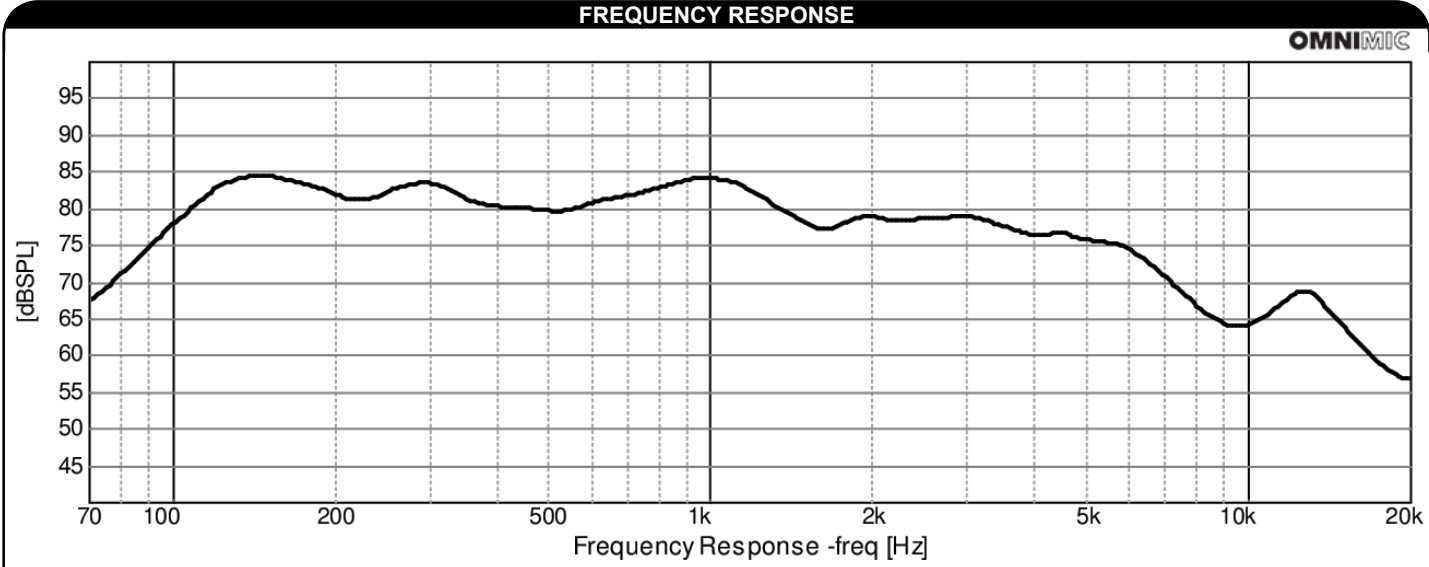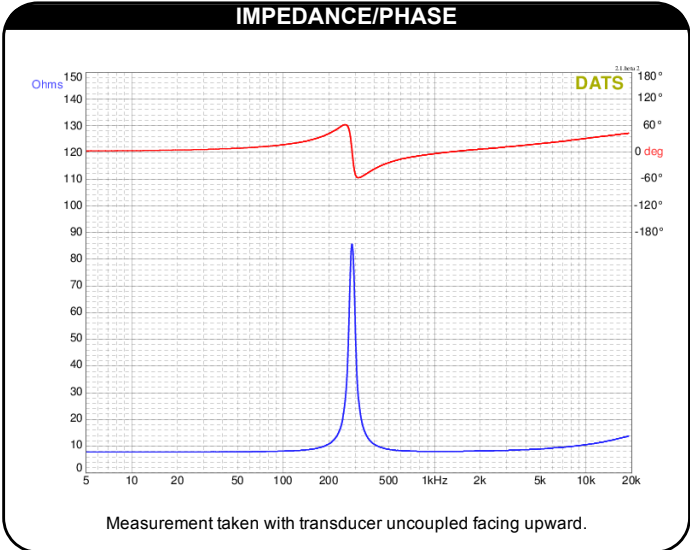

OmniMic

1/3<sup>rd</sup> octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.