

NS390-PR

15" Cast Frame Passive Radiator





Features

- Flat honeycomb fiberglass cone
- Low profile die-cast frame
- High excursion stable suspension
- Inverted deep-roll rubber surround
- Unique mass loading apparatus (mass included)
- Same cosmetics as NS Series drivers, can be used with others

Parameters

Impedance (Ω)	
Re (Ω)	
Le (mH) @ 1 kHz	
Fs (Hz)	22.0
Qms	3.90
Qes	
Qts	
Mms (g)	345
Cms (mm/N)	0.16
Sd (cm ²)	818
Vd (cm ³)	1,636
BL (Tm)	
VAS (liters)	151.2
XMAX (mm)	20
VC Diameter (mm)	
SPL (dB@1W/1m)	
RMS Power Handling (W)	
Usable Frequency Range (Hz)	

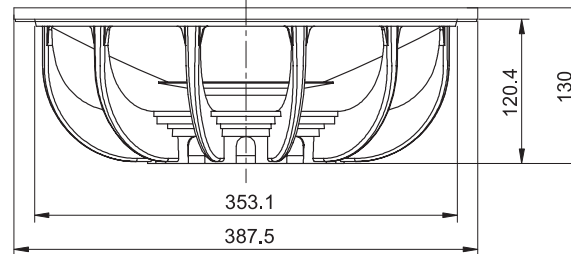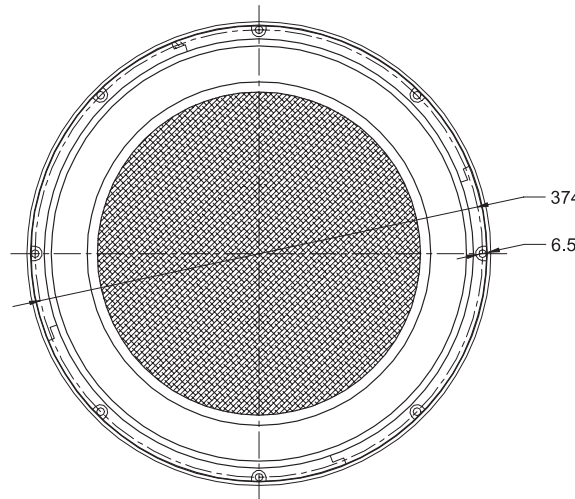

Note: All dimensions in mm.

Frequency Response

N/A

Impedance/Phase

N/A