




PTMini-6 Planar Tweeter 6 Ohm


PTMini-6

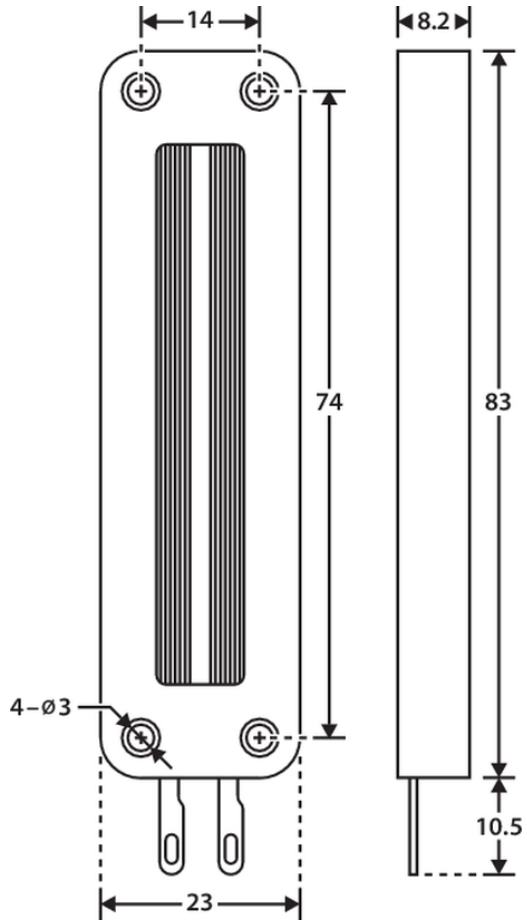

PARAMETERS

Impedance	6 ohms
Re	5.9 ohms
Le	N/A
Fs	4,461 Hz
Qms	1.78
Qes	N/A
Qts	1.74
Mms	N/A
Cms	N/A
Sd	5.4 cm ²
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	N/A
SPL	90 dB @ 1W/1m
RMS Power Handling	15 watts
Usable Frequency Range (Hz)	2,900 - 25,000 Hz


IMPEDANCE/PHASE

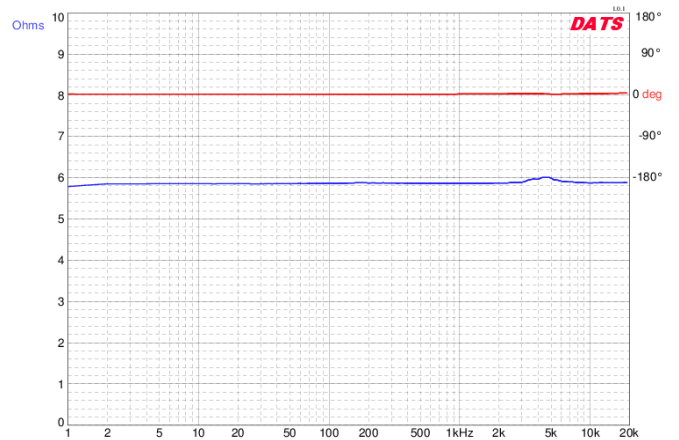

FEATURES

- Compact planar ribbon tweeter driver
- High output and exceptional treble definition
- Surface or flush mount installation
- Potent neodymium magnetic design
- Supports 4,000 Hz crossover, 12dB/octave

FREQUENCY RESPONSE

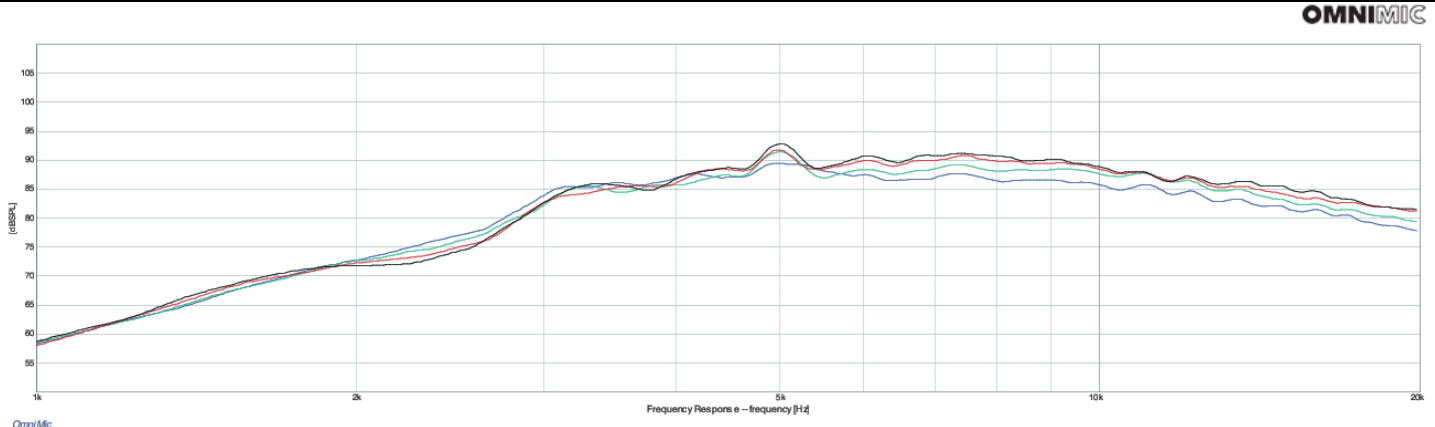

Note: 1/24th octave smoothing - nearfield response included in graph below 450 Hz.

Black = 0°
Red = 15°
Green = 30°
Blue = 45°