


FEATURES

- High economic value
- Delivers crisp, clear audio, ensuring an immersive listening experience
- High-quality audio solutions without breaking the bank, ideal for budget-conscious projects
- Suitable for commercial installations, DIY projects, art exhibits, and more


PARAMETERS

Impedance	8 ohms
Re	6.7 ohms
Le	0.14 mH @ 1kHz
Fs	97 Hz
Qms	7.92
Qes	0.90
Qts	0.81
Mms	3.0 g
Cms	0.889 mm/N
Sd	28.3 cm ²
Vd	7.64 cm ³
BL	3.72 Tm
Vas	0.998 liters
Xmax	2.7 mm
VC Diameter	20 mm
SPL	84 dB @ 2.83V/1m
RMS Power Handling (AES 426B)	15 watts
Usable Frequency Range (Hz)	80 - 18,000 Hz

IMPEDANCE/PHASE

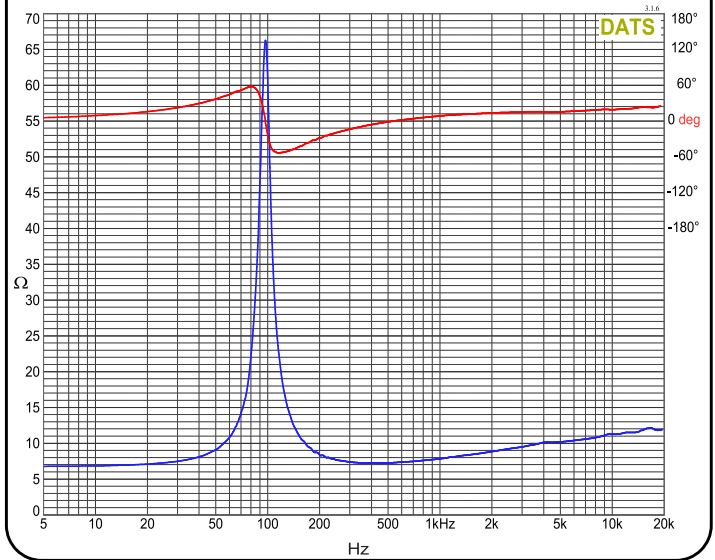

FREQUENCY RESPONSE

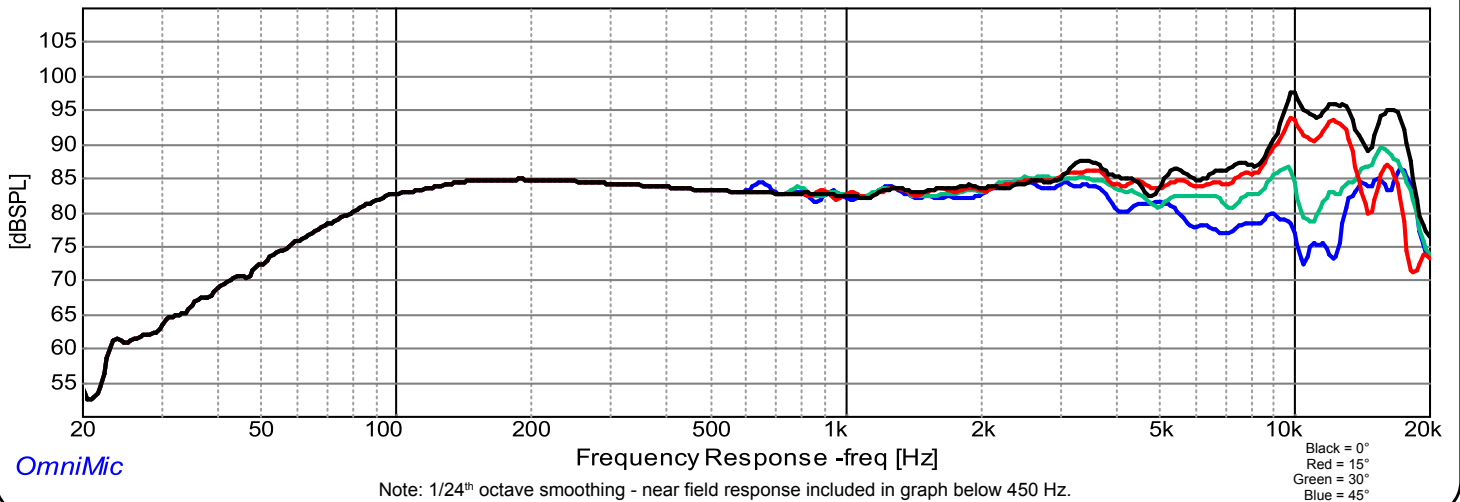

Note: 1/24th octave smoothing - near field response included in graph below 450 Hz.