




# DAEX32EP-4 Thruster 32mm Exciter 40W 4 Ohm



DAEX32EP-4

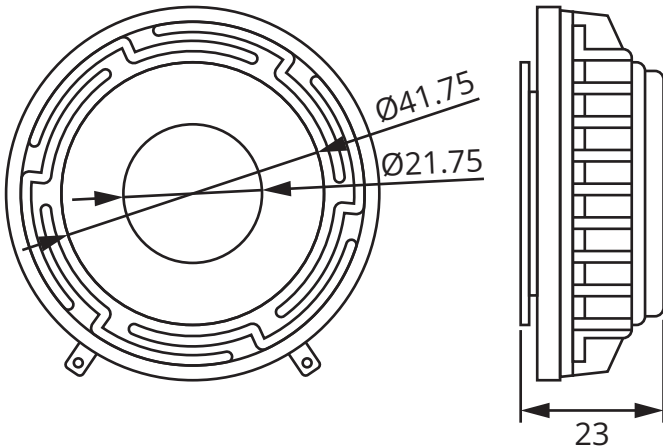

PARAMETERS	
Impedance	4 ohms
Re	3.3 ohms
Le	0.1 mH @ 1 kHz
Fs	450 Hz
Qms	N/A
Qes	N/A
Qts	2.5
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	32 mm
SPL	N/A
RMS Power Handling	40 watts
Usable Frequency Range (Hz)	N/A

- ### FEATURES
- Robust, heavy-duty design with a 32 mm voice coil attached to a steel spider
  - Pre-applied 3M™ VHB™ adhesive for quick, secure installation
  - Rare-earth neodymium motor and a proprietary two-layer voice coil
  - 4 ohms impedance for use with small, Class D amplifiers
  - 40 watt RMS power handling for high output

- ### APPLICATIONS
- Invisible home theater and multi-room audio
  - Electronic gaming machines
  - Advertising signage
  - Point-of-purchase displays
  - Multimedia exhibits
  - Commercial distributed audio
  - Kiosks
  - Automotive audio
  - Bathroom tubs and showers

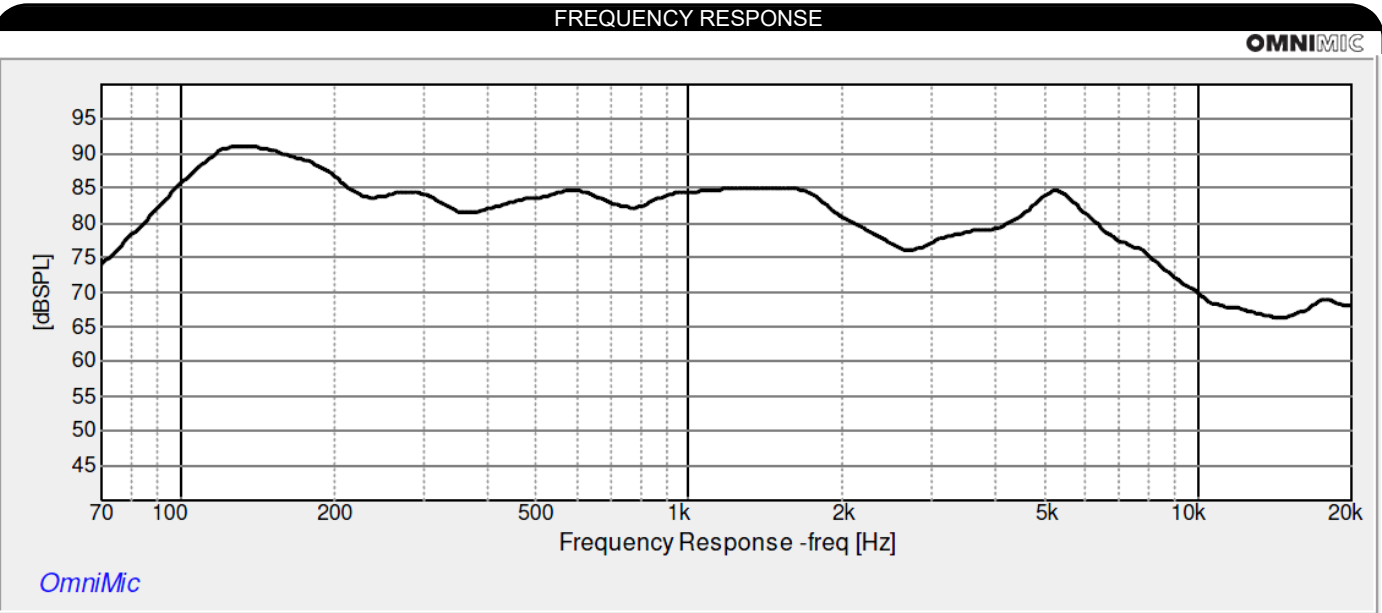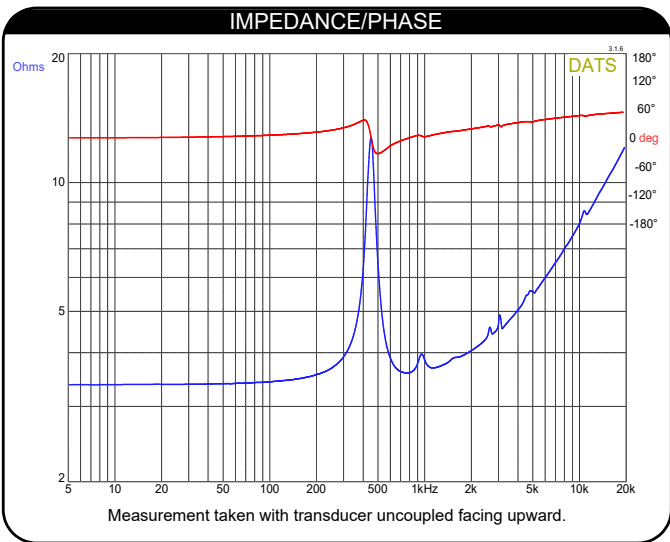

1/3<sup>rd</sup> octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.