




# DAEX-13-4SM Haptic Feedback and Audio Exciter 13mm 3W 4 Ohm

DAEX-13-4SM

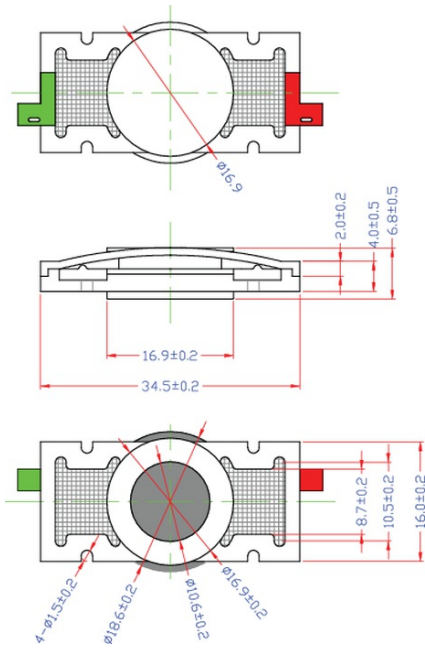

## PARAMETERS

Impedance	4 ohms
Re	3.7 ohms
Le	0.022 mH
Fs	950 Hz
Qms	N/A
Qes	N/A
Qts	N/A
Mms	N/A
Cms	N/A
Sd	N/A
Vd	N/A
BL	N/A
Vas	N/A
Xmax	N/A
VC Diameter	13 mm
SPL	N/A
RMS Power Handling	3 watts
Usable Frequency Range (Hz)	N/A


## FEATURES

- Extremely small but powerful design can fit almost anywhere
- Unique suspension allows high excursion for surprisingly powerful response
- Pre-applied 3M™ VHB™ adhesive for quick, durable installation
- Rare-earth neodymium motor and a proprietary 13 mm voice coil
- 4 ohms impedance for use with small, Class D amplifiers

## APPLICATIONS


- Invisible home theater and multi-room audio
- Electronic gaming machines
- Advertising signage
- Point-of-purchase displays
- Multimedia exhibits
- Commercial distributed audio
- Kiosks
- Automotive audio
- Bathroom tubs and showers

## IMPEDANCE/PHASE

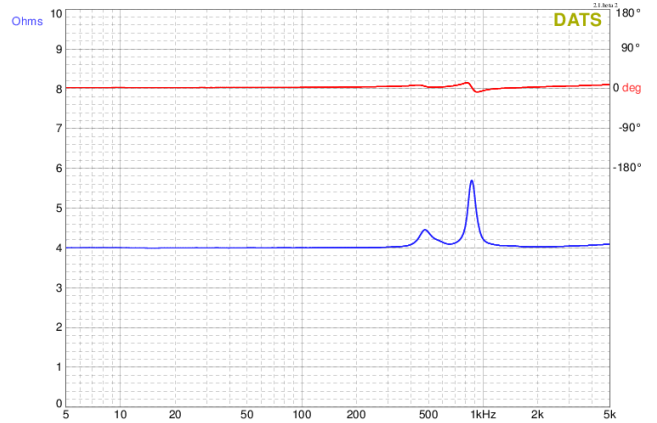

Measurement taken with transducer uncoupled facing upward.

## FREQUENCY RESPONSE

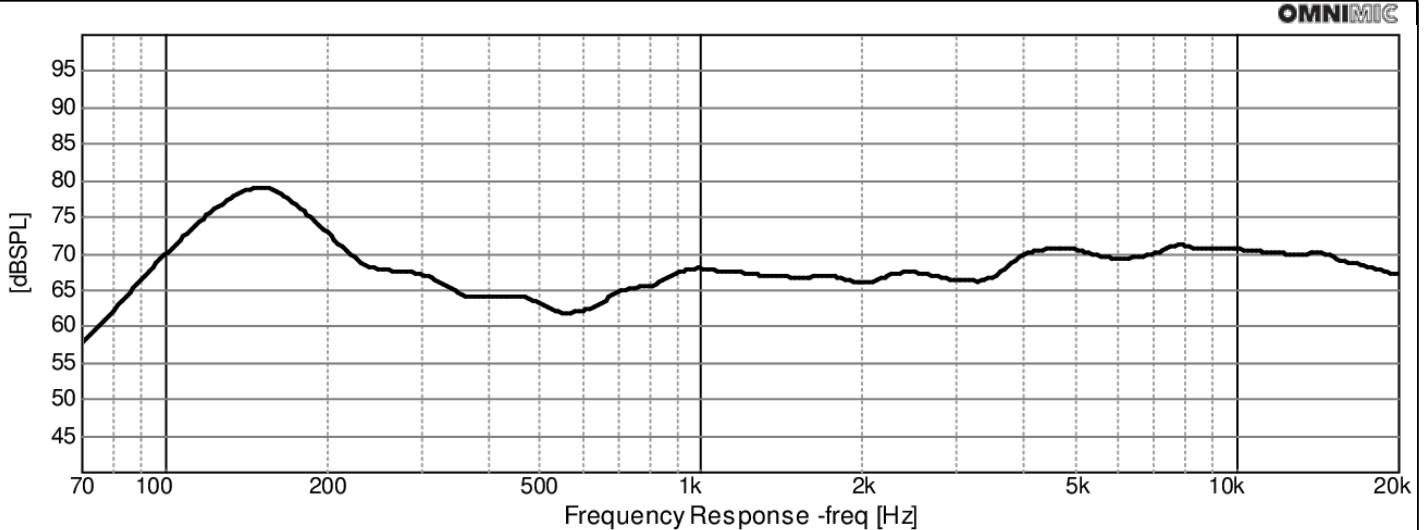

OmniMic

1/3<sup>rd</sup> octave smoothing - measurement taken with transducer adhered off-center on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.