




10" Signature Series DVC Subwoofer 2 Ohm per Coil SS10-22

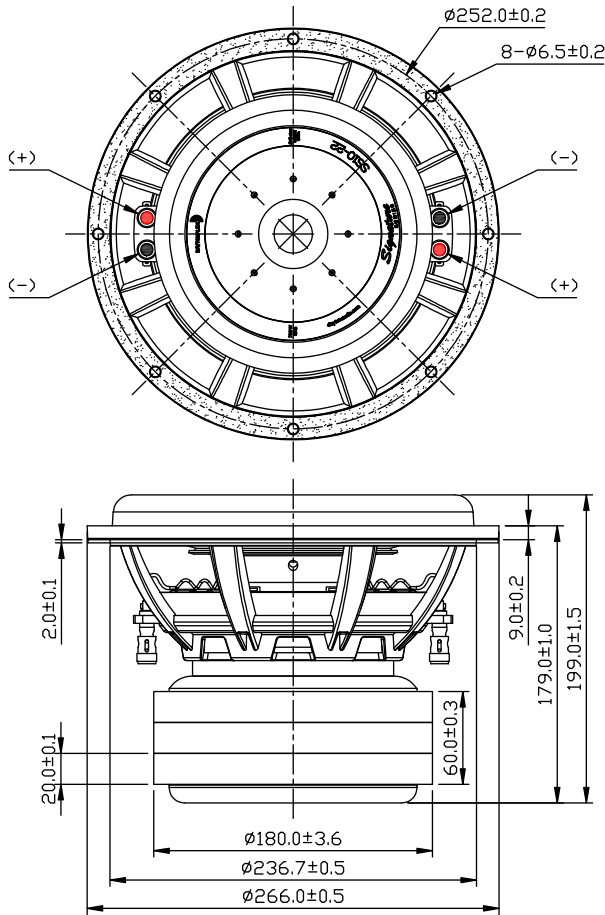

FEATURES


- Sleek and rigid one piece aluminum cone with rubber surround
- Triple shorting paths minimize inductance and reduce distortion
- Powerful triple magnet design to maximize motor strength
- 2-1/2" 4-layer CCAW voice coil for high power handling
- Dual spiders maintain cone linearity even at extremely high excursion
- Ample venting facilitates maximum airflow across the voice coil

PARAMETERS

Impedance:	2 + 2 ohms
Re:	4.4 ohms
Le:	1.6 mH
Fs:	34 Hz
Qms:	3.80
Qes:	0.45
Qts:	0.40
Mms:	180g
Cms:	0.122 mm/N
Sd:	344.5 cm ²
Vd:	627 cm ³
BL:	19.4 Tm
Vas:	20.6 liters
Xmax:	21 mm
VC Diameter:	63.5 mm
SPL:	87.1 dB@2.83V/1m
RMS Power handling:	700 watts
Usable Frequency Range (Hz):	20-500 Hz

*Dual 2-ohm voice coils. All specifications measured with voice coils wired in series.
**at 70% BI (Klippel verified)

IMPEDANCE/PHASE

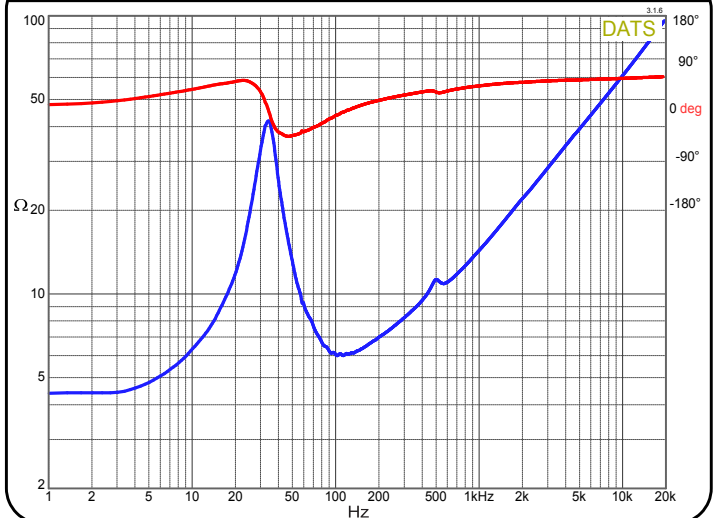

FREQUENCY RESPONSE

