


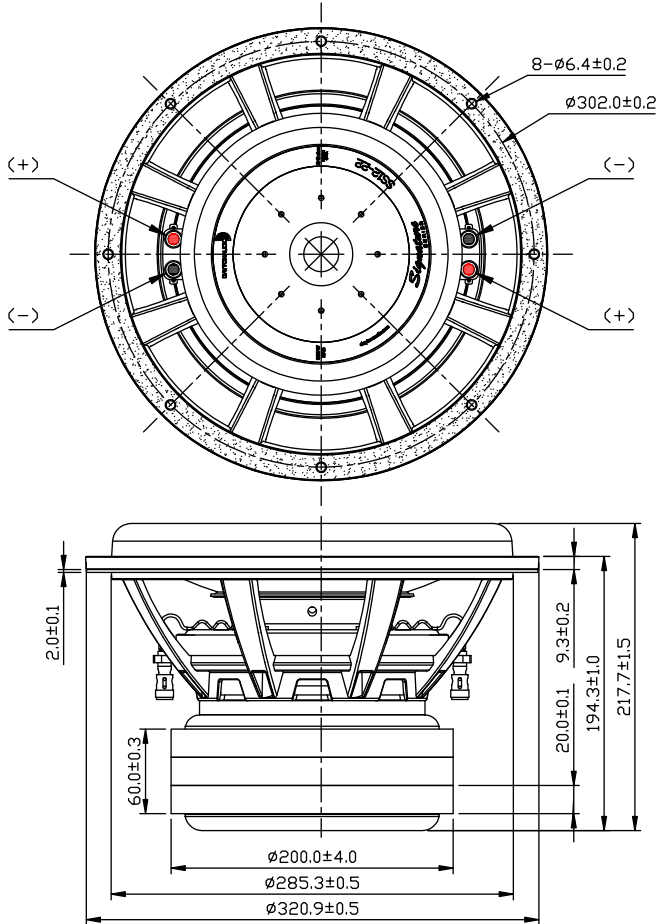

FEATURES


- Sleek and rigid one piece aluminum cone with rubber surround
- Triple shorting paths minimize inductance and reduce distortion
- Powerful triple magnet design to maximize motor strength
- 3" 4-layer CCAW voice coil for high power handling
- Dual spiders maintain cone linearity even at extremely high excursion
- Ample venting facilitates maximum airflow across the voice coil

PARAMETERS

Impedance:	2 + 2 ohms
Re:	4.9 ohms
Le:	1.8 mH
Fs:	27 Hz
Qms:	3.47
Qes:	0.39
Qts:	0.35
Mms:	275g
Cms:	0.125 mm/N
Sd:	528 cm ²
Vd:	1194 cm ³
BL:	24.3 Tm
Vas:	49.4 liters
Xmax:	23 mm
VC Diameter:	77 mm
SPL:	88.1 dB@2.83V/1m
RMS Power handling:	900 watts
Usable Frequency Range (Hz):	20-500 Hz

*Dual 2-ohm voice coils. All specifications measured with voice coils wired in series.
**at 70% BI (Klippel verified)

IMPEDANCE/PHASE

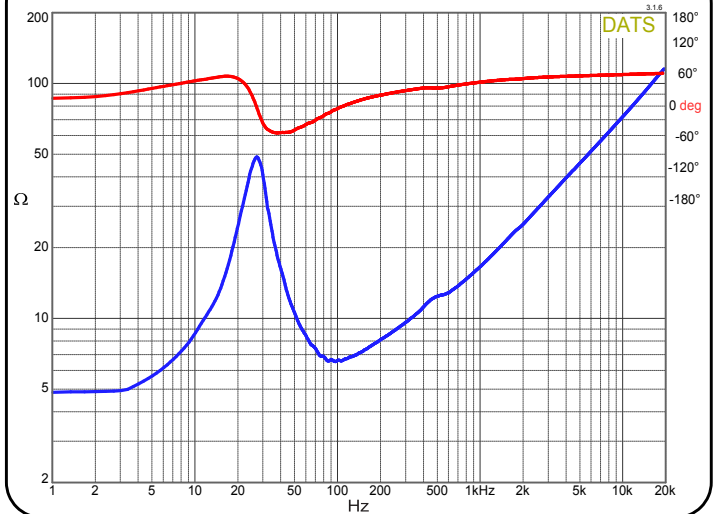

FREQUENCY RESPONSE

