




15" Signature Series DVC Subwoofer 2 Ohm per Coil SS15-22

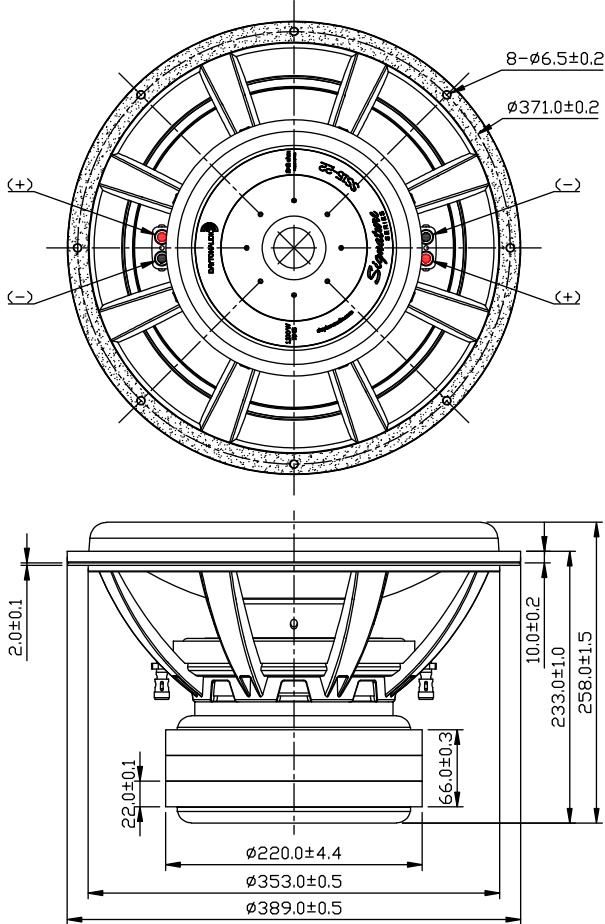

FEATURES


- Sleek and rigid one piece aluminum cone with rubber surround
- Triple shorting paths minimize inductance and reduce distortion
- Powerful triple magnet design to maximize motor strength
- 3" 4-layer CCAW voice coil for high power handling
- Dual spiders maintain cone linearity even at extremely high excursion
- Ample venting facilitates maximum airflow across the voice coil

PARAMETERS

Impedance:	2 + 2 ohms
Re:	5 ohms
Le:	1.9 mH
Fs:	27 Hz
Qms:	3.27
Qes:	0.44
Qts:	0.38
Mms:	317g
Cms:	0.11 mm/N
Sd:	800 cm ²
Vd:	1758 cm ³
BL:	24.9 Tm
Vas:	98 liters
Xmax:	22 mm
VC Diameter:	77 mm
SPL:	90.6 dB@2.83V/1m
RMS Power handling:	1100 watts
Usable Frequency Range (Hz):	20-400 Hz

*Dual 2-ohm voice coils. All specifications measured with voice coils wired in series.
**at 70% BI (Klippel verified)

IMPEDANCE/PHASE

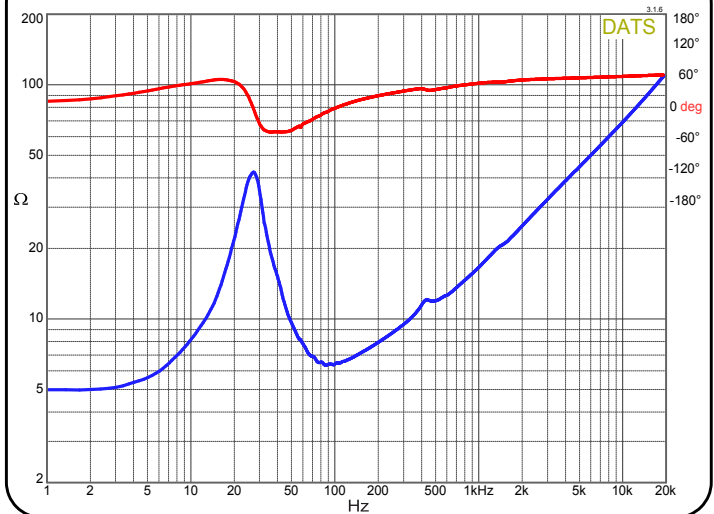

FREQUENCY RESPONSE

