

## 8" COMMERCIAL AUDIO PENDANT SPEAKER 70V/100V/8 OHM WHITE

Model: WP80XTW

### Features:

- **Passive Radiator:** Enhances bass performance for deeper, richer audio.
- **Durable Construction:** IP66 weather-resistant ABS plastic for reliable outdoor use.
- **Versatile Compatibility:** Integrated 70V/100V transformer with 8-ohm bypass for multiple setups.
- **Stylish Finish:** Sleek black or white enclosure suits any aesthetic, from modern to classic.

### Applications:

The Dayton Audio WPX Indoor/Outdoor Multi-Purpose Speaker is designed to deliver exceptional audio performance in any setting. Its IP66-rated weather-resistant ABS plastic construction ensures durability in outdoor environments, while its sleek, modern design seamlessly integrates into indoor spaces, making it both functional and stylish.

Designed to withstand the elements, these speakers feature durable, weather-resistant ABS plastic construction, ensuring long-lasting performance in any environment. Whether you're enhancing an outdoor patio, a commercial venue, or an indoor space, Dayton Audio pendant speakers provide reliable, high-quality sound to suit your specific needs.

The Dayton Audio Pendants stand out with their built-in passive radiator, delivering extended bass response rarely found in pendant-mount speakers. This innovative feature allows them to significantly outperform sealed pendant speakers of similar size. Ideal for both commercial and residential audio setups, the WPX Pendants ensure a richer, more immersive sound experience in a compact, stylish design.

### What's in the Box:

WPX Pendant Speaker  
Top Cover  
Eyebolt and Nut  
Hanging Cable with Carabiner  
Manual




### Technical Specifications:


Frequency Response	37-20,000 Hz
Power Handling	50W RMS (80W max)
Speaker Type	2-Way Pendant with Passive Radiator
Sensitivity	88 dB
Impedance	8Ω, 70V/100V
70V Taps	3.12W, 6.25W, 12.5W, 25W
100V Taps	6.25W, 12.5W, 25W, 50W
Transducers	
Woofer	8" Graphite Cone with Rubber Surround
Tweeter	1" Silk Dome
Max SPL (8 Ohm, 2.83V/1m)	105 dB
Coverage Angle	90°
<b>General</b>	
Dimensions (H x W)	14.75 x 10 in. 375 x 253.4 mm
Weight	10.99 lbs. (4.98 kg)
Ingress Protection Rating	IP66
Color	White

*All specifications are accurate at the time of printing. Dayton Audio reserves the right to make improvements without notice.*


## Frequency Response:

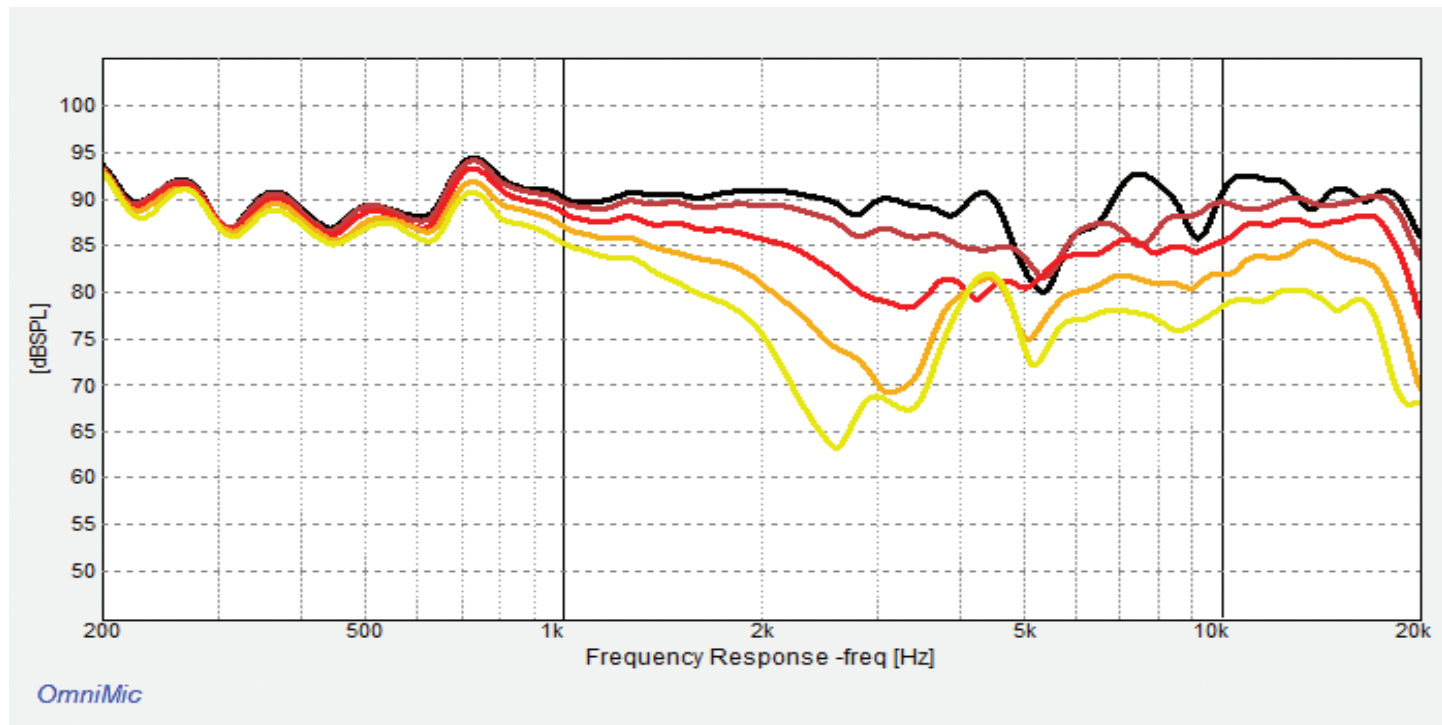

## Dimensions:

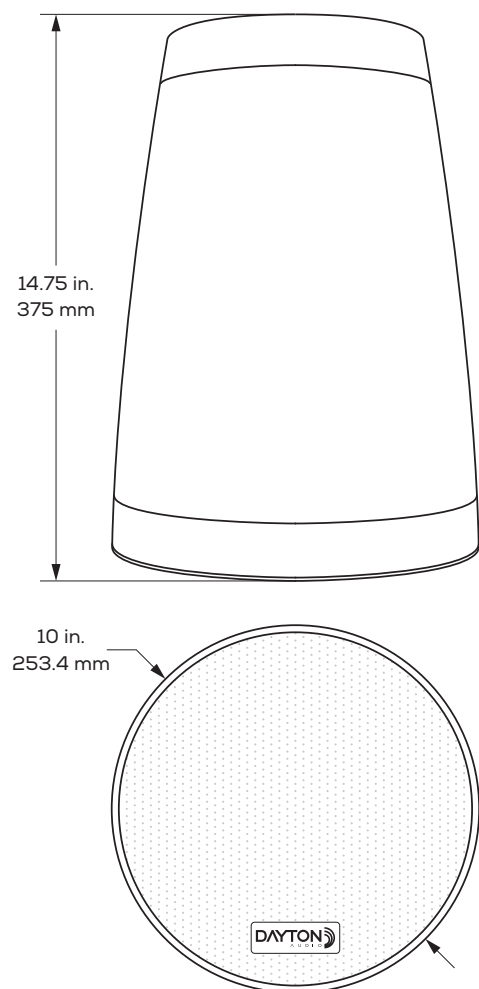

## Impedance:

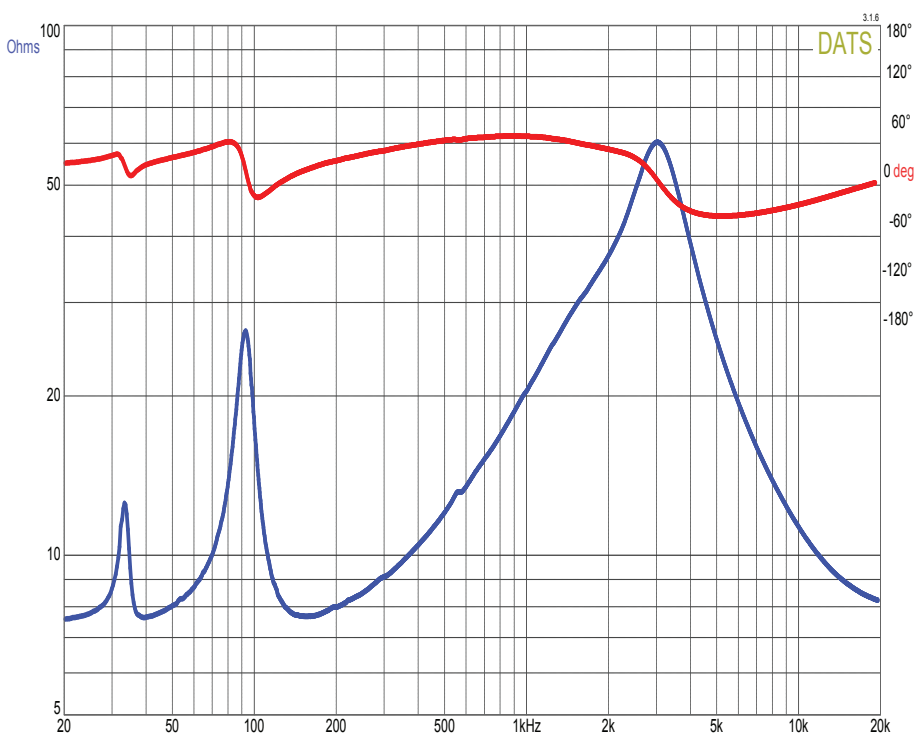

daytonaudio.com  
tel + 937.743.8248  
info@daytonaudio.com

705 Pleasant Valley Dr.  
Springboro, OH 45066  
USA